

THOMSON



GPS PERSONAL WATCH

MONTRE GPS DE LOCALISATION

THOMSON

GPS Personal Watch
BB8297



Bigben Interactive FRANCE
Rue de la voyette CRT2 - 59814
LESQUIN Cedex

THOMSON Personal Watch

Thank you for purchasing this THOMSON product. In case of a malfunction please refer to the support information at the end of this manual. We highly appreciate any feedback which helps us to improve our products. Please keep this instruction manual for future reference.


WARRANTY

This product bearing the THOMSON trademark, is guaranteed by the manufacturer for a period of 1 year from the date of purchase, and will, during this period, be replaced with the same or a similar model, at our option, free of charge if there is a defect due to faulty material or workmanship. This guarantee does not cover defects arising from accidental damage, misuse or wear and tear and is available only to the original purchaser of the product. This does not affect your statutory rights.

CONTENTS OF THE PACKAGE


- GPS Personal Watch Unit
- USB Charging cable
- Screw driver
- Quick start manual

PERSONAL WATCH ELEMENTS

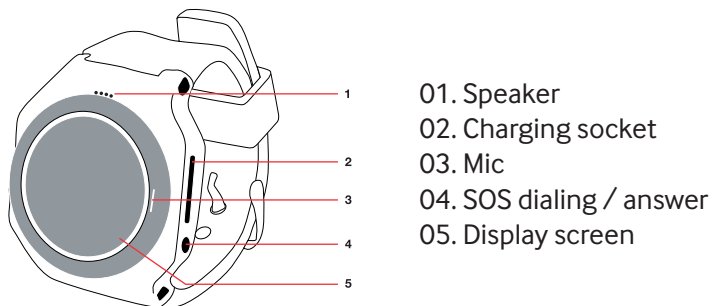

CHARGING YOUR PERSONAL WATCH

01. Your THOMSON Personal Watch features a built-in rechargeable battery. To charge it, you need to use the charging cable which has been supplied with the device. Plug the USB connector into an AC adaptor (maximum rating 1A output) with a USB AC adaptor (e.g. the one which came with your smartphone) or directly in to the USB socket of your computer.
02. Open the USB connection on the right side of the watch and attach the cable. Attach the opposite end of the cable to a power source and allow 2 hours for charging.




NOTE: Please note that the Personal Watch needs to be charged using the supplied cable as most other USB cables will not fit.

INSTALLING A SIM CARD


Your THOMSON Personal Watch relies on GPS technology and modern mobile devices. In order for these to work it requires a Micro SIM card with a 2G data, talk and text plan included. 20MB and 200 texts per month should be sufficient for normal use. Make sure that the card is already registered with your operator and take careful note of the sim card phone number.

Make sure the SIM card, which you intend to use, does not require a PIN code to work, since the Personal Watch will not function correctly.


01. Slide the sim card holder down and fold up so you can fit the sim card. Insert the sim card, fold the holder down and slide the holder up so it locks into position.

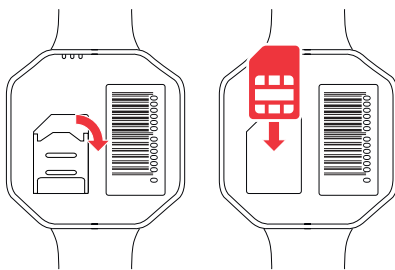

02. Insert the battery and close the cover. Take care that the thin membrane is correctly fitted otherwise the watch will not be waterproof. Refit the 4 screws.

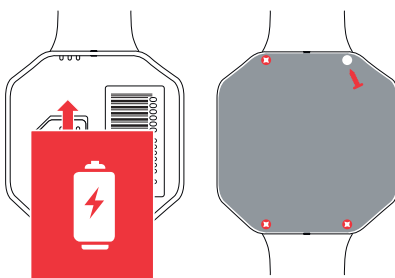

03. Now press the SOS button for 3 seconds to switch on the watch. The Thomson name will appear and after a few seconds the Hours / date / day / Battery life and Network status, will be displayed.

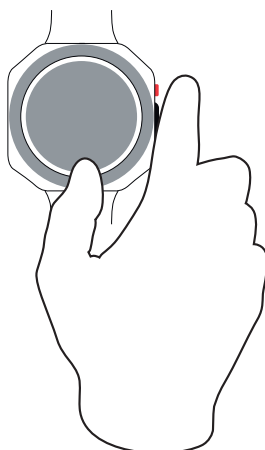

NOTE: The first time you use your watch the information on the screen is not correct. You may need to wait a few minutes for the time to reset to your time zone.

You now need to set-up your watch with the application. Please follow these steps:

GPS P WATCH APP

- Installing the GPS P WATCH application


Look for the "GPS P WATCH" app in the Apple store/Google Play store and download it to your mobile device.



- Registering an account


For your Personal Watch to work you will need to register an account first. This is required so you can use your mobile device to connect to the THOMSON server that the Personal Watch is sending its data to. The first time you open the app or when you've logged out of your account, you will see the login screen which allows you to register new accounts.

01. Press `Registration` to start

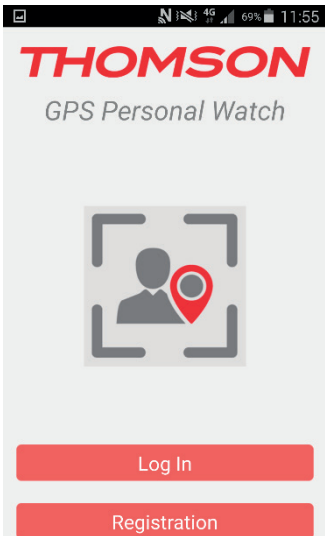


02. Add all the information requested, in all the boxes, and press `Register`.

Note: Please ensure that you also read and agree to the user agreement.

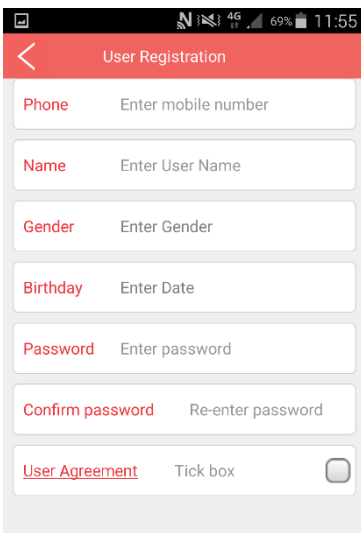

03. You can login using your phone number and password

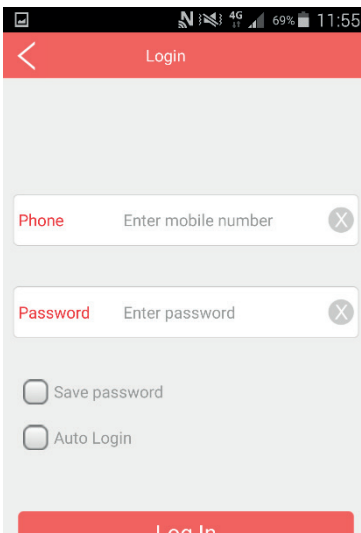


-

- Registering your Personal Watch



You now need to register your Personal Watch on your account. For the first installation the app will ask you to add a new device.

01. Press 'Add devices now'

02. Manually add the serial number of the device or scan the barcode. You can find this on the last page / rear of the instruction booklet. This code is also found on the inside of the watch.

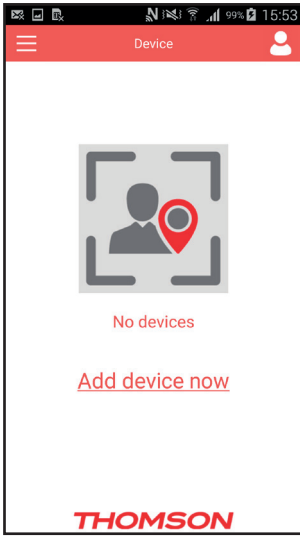

You will need to add your account password twice to bind the watch to your account.

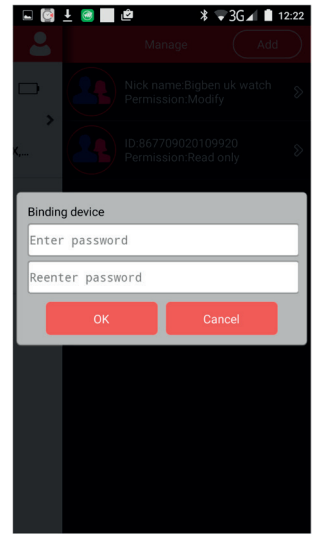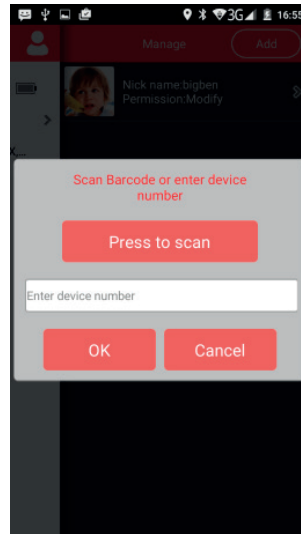



03. Your Personal Watch is now synchronized with your device and added to your account.

THE MAIN SCREEN

After logging in, you will see the main screen. This screen shows your added device with some information such as your device name / date / hours and the precise location of the Personal Watch.

To activate the GPS function you will need to go outside as GPS does not work inside buildings.

To set-up the Personal Watch press the person icon in the top right hand corner of the screen. This will take to the 'Manage' screen.

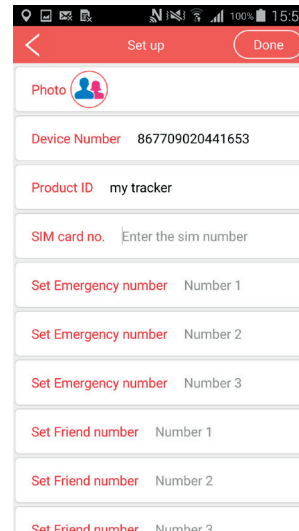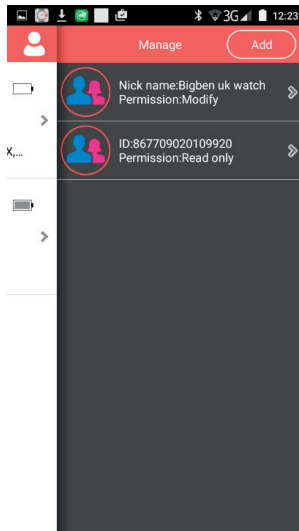

Press on the 'Account name' and it will take you to the set-up options.

- PHOTO

The first option allows you to add a photo. You can take a new photo with your mobile device or select an image from your existing library.

- DEVICE NUMBER

This is the number of your Personal Watch that you scanned earlier.

- PRODUCT ID

You can rename the watch with this option.

- SIM CARD NUMBER

This is the number on the SIM card inside the watch.

- SET EMERGENCY NUMBER

Add numbers that your child can call in the event of an emergency. This will also allow you to call this number.

- SET FRIEND NUMBER



This allows you to enter up to 5 other permitted numbers that can call the watch.

- SET MONITOR NUMBER

These numbers allow you to call the watch and listen without the watch being answered.



- SET GEO-FENCE

This allows you to set-up a perimeter from any set area. If your child wanders outside the geo-fence you will receive a notification on your mobile device. You can set from 200M to 500M.

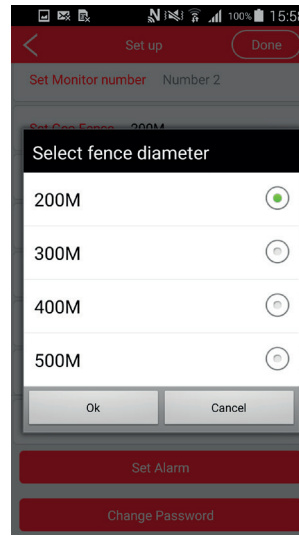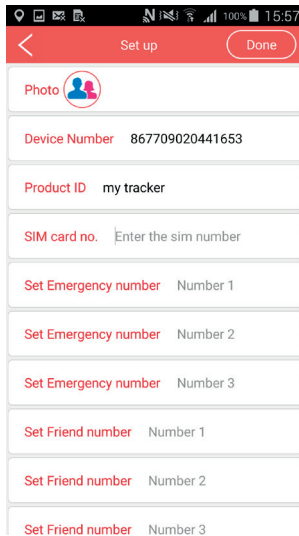



- SET DAYS

You can set the days that you want `alarms` to be set, i.e: reminders.

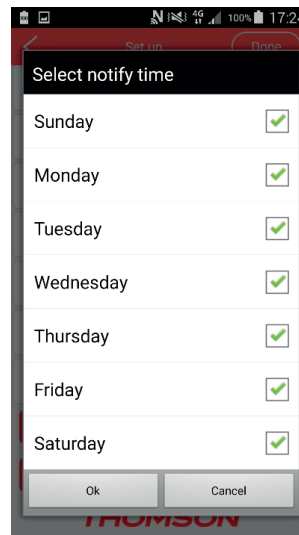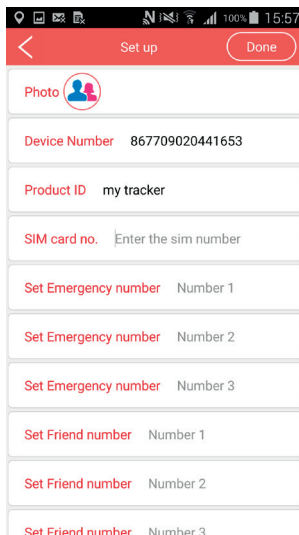


- SET WI-FI

If you are in a Wi-Fi zone you can pair to this Wi-Fi signal to allow in door tracking.

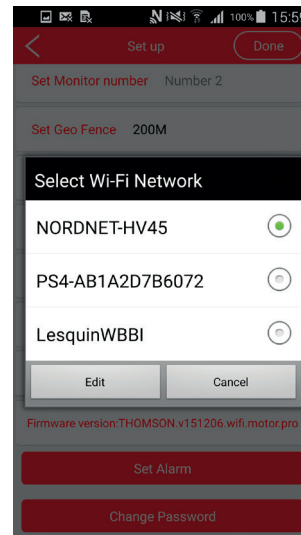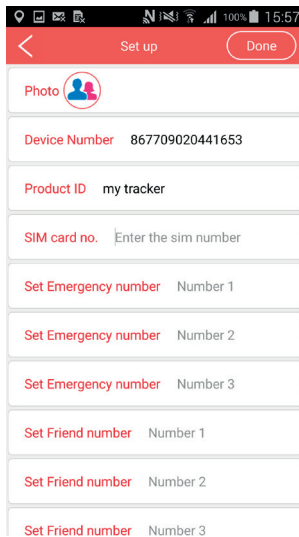


• SET ALARM

Input the time and date for an alarm on the watch. You can also name the alarm type.

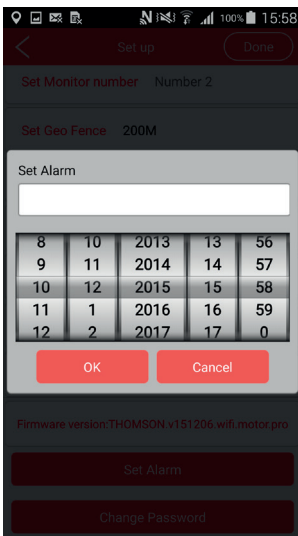


• Change password

This allows you to change the login password.

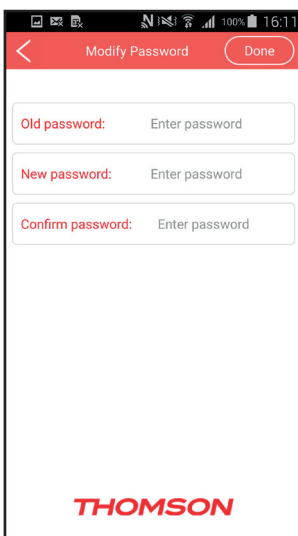

Press `Done` at the top of the screen BUT make sure your watch is switched on otherwise it will not be updated. To activate the Map Tracking function press on the information / icon area.

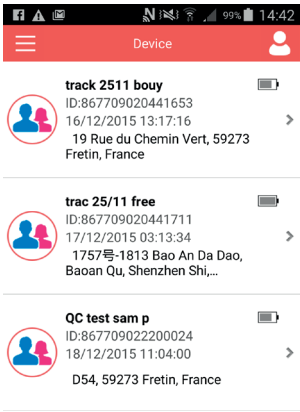


THOMSON

MAP TRACKING PAGE



On this page you have some options such as:

- MAP setting: You can choose if you prefer the standard map or satellite view.
- Compass button : Which indicates North position
- Zoom buttons : Enlarge or reduce the map view. You can touch the screen to enlarge or reduce.

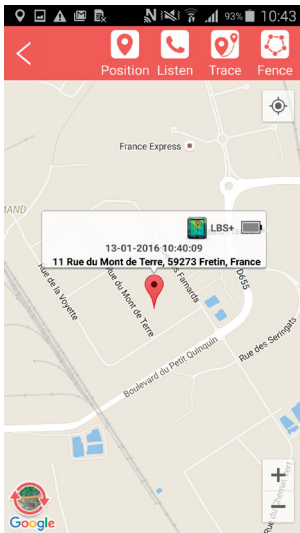


POSITION

Click on this option to show the current location of your Personal Watch, date and hours, battery level and signal type, (e.g: GPS or GSM). If you press the position button, the tracker is checked every 40 seconds for the next 30 mins

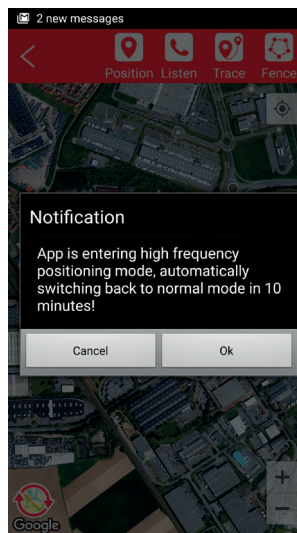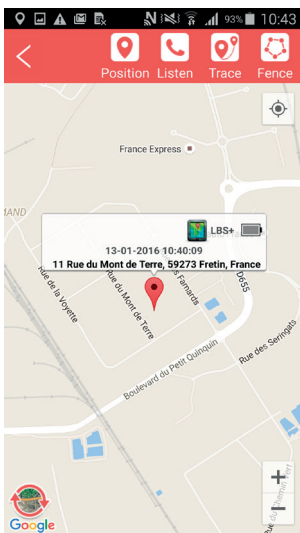


CALL

- There are 2 x options available:
 - a) To make a 2-way call simply call the SIM card from your contact list, on your device. (Make sure you have added your number as one of the emergency numbers on the set-up page).
 - b) Press the call button, (at the top of the page). This allows you to make a `monitor' call to hear what is happening but without activating the call alert on the watch. This could be useful in an emergency. Make sure you have added your phone number in the Set Monitor number section in the Set up section.

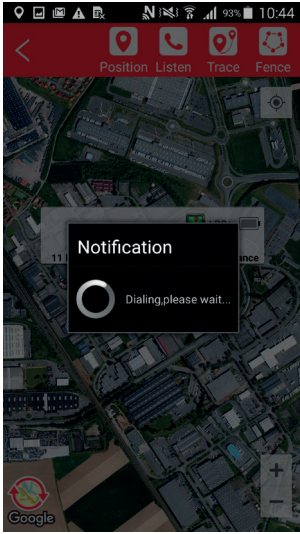

TRACE

Input a date and check all the movement of the tracker for that day


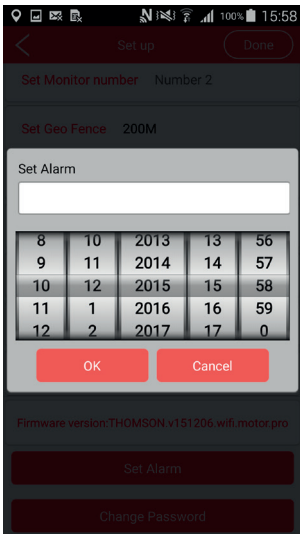


FENCE

A "Fence" is a virtual boundary for a zone which the Personal Watch is not supposed to leave. For example if you use the Personal Watch device on your child, you could set up a geo-fence around your house or property to get an alert if your child leaves the area.

To set up a geo-fence, you need to press the "Fence" icon and then press "Add"

01. Enter the name of the Fence zone
02. Choose if you want to receive a notification when the watch enters or leaves the set area.
03. To add a geo-fence simply add an area on your map.

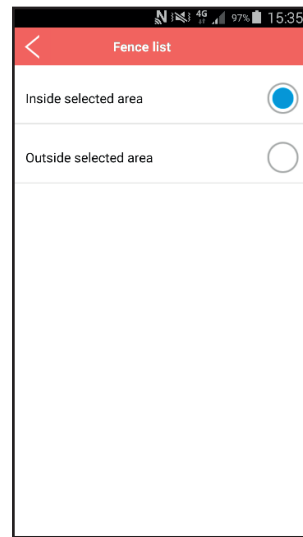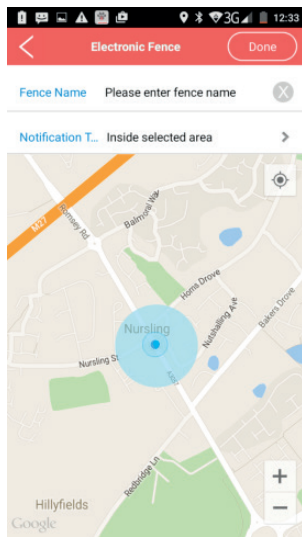

04. Press `Done` to add the fence.

05. **NOTE:** The default radius is set at 200m.

06. Press the back arrow, (in the top left corner), twice to go back to the main page.



Note: that the geofence will only work on an outdoor GPS signal so the wearer will have to be in an outside location to activate the geo-fence alarm.

MENU PAGE


Press the menu icon, in the top left corner, to take you to the menu page.

On this page you have access to your Device, Notification, Settings, Help section and information on the Personal Watch.




Push on this buttons and you back to the main screen.


NOTIFICATION

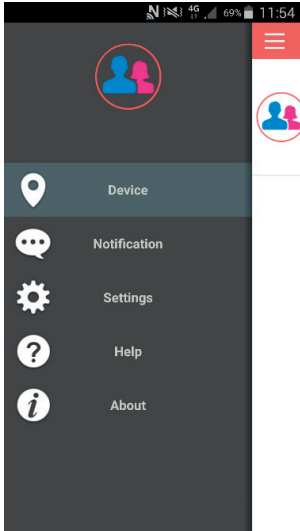


Pressing Notifications takes you to the notifications list to show all notification alerts.

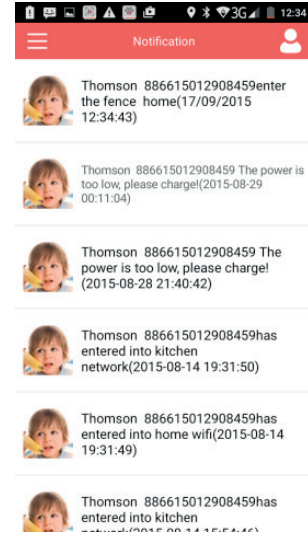

SETTINGS

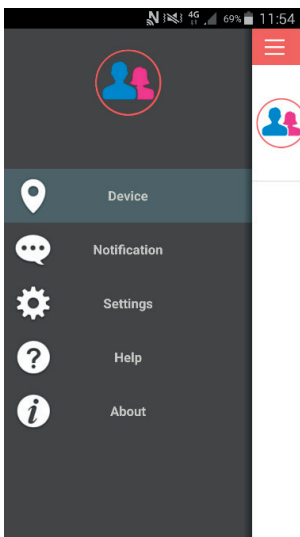


Pressing Settings takes to the settings page.

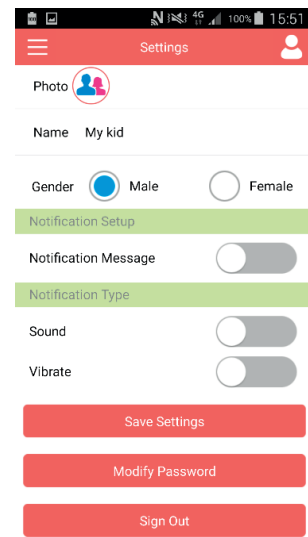


• On this page:


- You can add a photo
- Change the name
- Indicate male or female
- Select if you want to receive notifications
- Choose what type of notifications :Sound or vibration
- Modify your password
- Log out.

Note: Make sure you press `save settings` when you make any adjustments

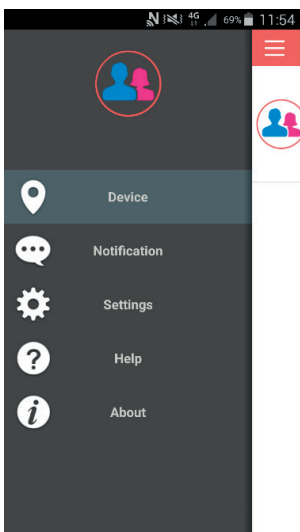


Pressing Help takes you to the help page. Press on full instructions to be directed to the help page link where you can find these instructions/

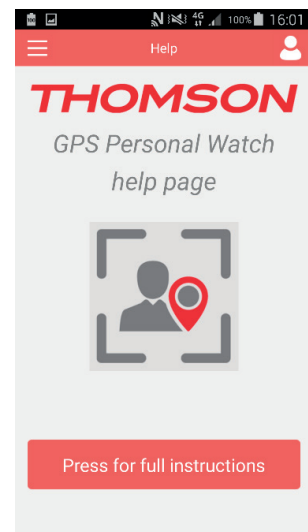

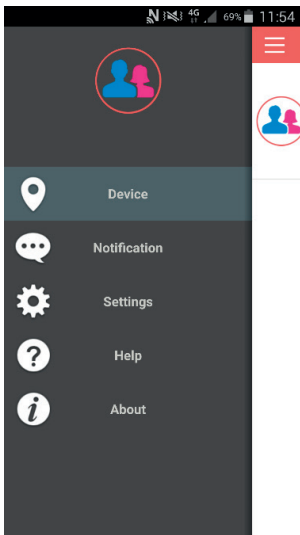


Pressing About takes you to the about page for information about Thomson, press on the link to be directed to the Thomson consumer website. This website also displays the APP version number.

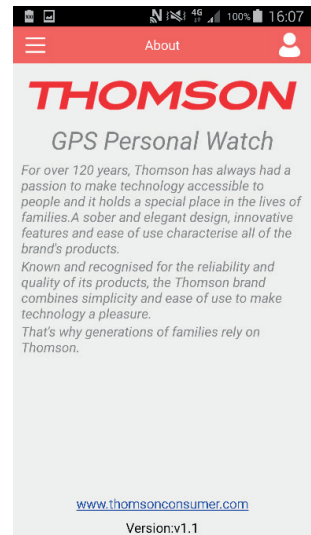


ADDING ADDITIONAL TRACKERS

Press the `Person` icon, in the top right hand corner of the main page, and then press the `Add` button on the Manage page. If you have more than one tracker you can add it to the same account.



01. Press Add devices now

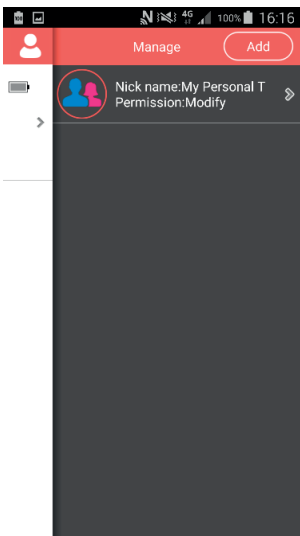

02. Manually add the serial number of the device or scan the barcode.

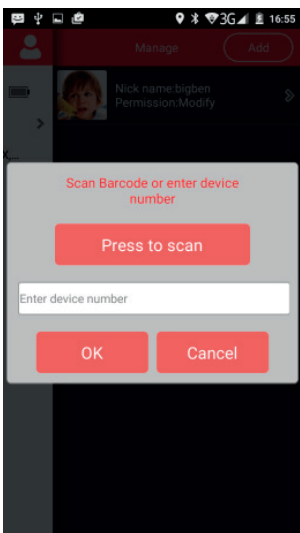

03. If you are adding a watch that is assigned to another account the APP will ask you for a password which you will have to obtain from the master account holder. You can then track multiple watches on your account. NOTE: You cannot make adjustments to the watch if you are not the master account holder.

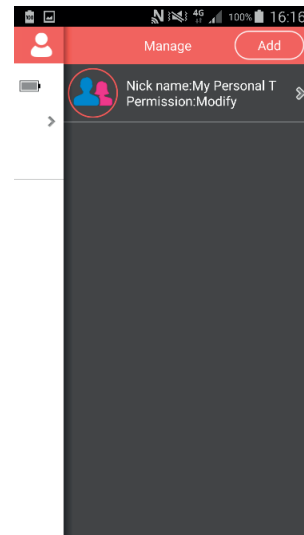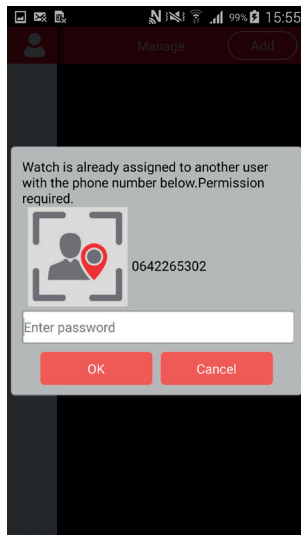

If there is an issue with the registration you will see the below screen and the reason for the problem is listed.



TROUBLESHOOTING

- Ensure you have followed the full registration process
- Check if your SIM card is inserted correctly
- Make sure the tracker is switched on
- Make sure that all the settings are OK

I'M NOT RECEIVING ANY NOTIFICATIONS OR MESSAGES

- Make sure you have sufficient credit on your SIM CARD.
- Ensure you have the push alert settings switched on in the settings.
- Make sure that you have used the correct SIM CARD numbers in the APP
- Make sure the Watch is switched on and has power.

THE TRACKER IS NOT PROVIDING IT POSITION

- Push on the location icon in the MAP screen to increase the tracking frequency.

RECYCLING



This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. Instead it should be taken to an applicable collection point for the recycling of electrical and electronic equipment. By ensuring that this equipment is disposed of correctly you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. The recycling of materials will help to conserve natural resources.

For more information please contact your local council or waste disposal service.

IMPORTANT SAFEGUARDS & PRECAUTIONS:

- Read this user's manual carefully before using the THOMSON Personal Watch and keep this manual in a safe place for future reference.

- Avoid exposing the THOMSON Personal Watch to extreme conditions for an unreasonable time.
- Avoid rough use or severe impacts on the THOMSON Personal Watch.
- Keep the device away from magnets or appliances which contain magnetic components such as speakers or motors as these items may ruin the sensors.
- Clean the device with a soft cloth after outdoor usage.
- DO NOT expose the device to strong chemicals such as gasoline and alcohol as they will damage the device.
- DO NOT dispose the THOMSON Personal Watch into fire as the battery inside the main unit may explode.
- Do not immerse the Watch in water or liquids

TECHNICAL SPECIFICATION:

- Dimensions (L x W x H): 75mm x 34mm x 7mm
- Weight: 40g
- Positional accuracy: 15m
- Battery: 3.7V ~ 4.2V, 500mAh Li-Polymer
- Standby current: ~200mA
- Charging current: ~600mA
- Charge duration: ~2h
- Endurance time: ~Up to 72h (battery life depends on GPS tracking frequency)

Customer Support:

For UK support contact: support@bigben.fr

Legal lines:

iOS® and iPhone® are trademarks of Apple Inc., registered in the U.S. and other countries. Android™ and Google Play™ are trademarks of Google Inc. All other trademarks are the property of their respective owners.

Country	MCC MNC	Network	APN	User Name	Password	bands
Albania	276 02	Vodafone	Twa	NULL	NULL	900/1800
Argentina		CTI	internet.ctimovil.com.ar	guest	guest	
Argentina	722 10	Movistar	internet.gprs.unifon.com.ar			
internet.unifon	wap	wap	850/1900			
Argentina	722 34	Personal	gprs.personal.com	[mobile number]	adgj	850/1900
Australia	505 02	Optus	internet	NULL	NULL	900/1800
Australia	505 01	Telstra	telstra.internet	NULL	NULL	900/1800
Australia		Telstra				
(data bundles)	telstra.datapack	[blank]	Telstra	Telstra		
Australia		Telstra				
(pay by time)	telstra.pcpack	[blank]	Telstra	Telstra		
Australia		Three	3netaccess	a	a	a
Australia	505 03	Vodafone	vfinternet.au	NULL	NULL	900/1800
Austria		Drei	drei.at	guest	guest	guest
Austria		Max Online	gprsinternet	GPRS	[blank]	[blank]
Austria		Max Online				
(Business)	business.gprsinternet	GPRS	[blank]	[blank]		
Austria		Max Online				
(Metro)	gprsmetro	GPRS	[blank]	[blank]		
Austria	232 01	Mobilkom A1	a1.net	ppp@a1plus.at	ppp	900/1800
Austria		OneNet	web.one.at	web	web	web
Austria	232 07	tele.ring 07	web	web@telering.at	web	1800
Azerbaijan	400 01	Azercell 01	internet	NULL	NULL	900/1800
Bangladesh	470 01	Grameen Phone	gpinternet	NULL	NULL	900
Belarus	257 01	VELCOM 01	web.velcom.by			
unlim.velcom.by	web					
unlim	web					
unlim	web					
unlim						
Belgium	206 10	Mobistar				
(personal)	internet.be	mobistar	mobistar	900/1800		
Belgium		Mobistar				
(business)	web.pro.be	mobistar	mobistar	mobistar		
Belgium		Orange	orangeinternet	guest	guest	guest
Belgium	206 01	Proximus				
(Internet)	internet.proximus.be	NULL	NULL	900/1800		
Belgium		Proximus				
(intranet)	intraprox.be	guest	guest	guest		
Botswana	652 01	Mascom Wireless	internet.mascom	NULL	NULL	900
Brazil	724 05	Claro	claro.com.br	claro	claro	claro
Brazil	724 16/24	Oi	gprs.oi.com.br	NULL	NULL	900/1800
Brazil		Oi (WAP)	wapgprs.oi.com.br	oiwap	oiioi	oiioi
Brazil	724 02/03/04	TIM	tim.br	tim	tim	900/1800
Brazil		Velox	wap.telcel.com	iesgprs	iesgprs2002	iesgprs2002
Bulgaria	284 05	GloBul	internet.globul.bg	globul	NULL	900/1800
Bulgaria	284 01	M-Tel	mms-gprs.mtel.bg	mtel	mtel	900/1800
Cameroon	624 01	MTN Cameroon	INTERNET	NULL	NULL	900
Canada	302	KORE Wireless	apn.zerogravitywireless.com	NULL	NULL	[blank]
Canada	302 370	Microcell				
(Fido)	internet.fido.ca	fido	fido	850/1800		
Canada	302 720	Rogers AT&T	internet.com	wapuser1	wap	850/1800
Chile	730 01	Entel PCS	imovil.entelpcs.cl	entelpcs	entelpcs	1900
Chile	730 02	Telefonica				
Movil	web.tmovil.cl	web	web	850/1800		

China	460 00/02/07	China Mobile 00/02/07	cmnet	NULL	NULL	900/1800
China	460 01/06	China Unicom	[none]	NULL	NULL	900/1800
Croatia	219 01	T-Mobile	web.htgpr	38591	38591	900/1800
Croatia	219 10	VIPNET START	gprs0vipnet.hr	38591	38591	900/1800
Croatia		VIPNET PRO	gprs5vipnet.hr	38591	38591	38591
Croatia		VIPNET 3G	3gvip.hr	38591	38591	38591
Colombia	732 102/123	Movistar	internet.movistar. com.co	movistar	movistar	850/1800
Congo		Vodacom	vodanet	vodalive	[blank]	1800
Costa Rica	712 01	IceCelular	icecelular	NULL	NULL	1800
Czech Republic	230					
	Cesky Mobil					
(contract)	internet	NULL	NULL	guest		
Czech Republic						
	Cesky Mobil					
(CM Prepay)	cinternet	guest	guest	guest		
Czech Republic	230 02	Telefonica				
(contract)	internet	NULL	NULL	900/1800		
Czech Republic						
	Telefonica					
(Go)	gointernet	guest	guest	guest		
Czech Republic	230 03	Vodafone				
(contract)	internet	NULL	NULL	900/1800		
Czech Republic						
	Vodafone					
(pre-pay)	ointernet	guest	guest	guest		
Czech Republic	230 01	T-Mobile	internet.t-mobile.cz	NULL	NULL	1800/1900
Denmark		3	[none]	guest	guest	guest
Denmark		Orange	web.orange.dk	guest	guest	guest
Denmark		Sonofon	[none]	guest	guest	guest
Denmark	238 01	TDC	internet	NULL	NULL	900/1800
Dominican Republic						
	Orange	orangenet.com.do	guest	guest	guest	
Egypt	602 02	Click Vodafone	internet.vodafone.net	internet	internet	900/1800
Egypt	602 01	MobiNil	mobilnilweb	NULL	NULL	900/1800
Estonia	248 01	EMT	internet.emt.ee	NULL	NULL	900/1800
Estonia		RLE	internet	guest	guest	guest
Finland	244 03	Dna	internet	NULL	NULL	1800
Finland	244 05	Elisa				
(Radiolinja)	internet	rlnet	internet	900/1800		
Finland		Saunalahti	internet.saunalahti	guest	guest	
Finland	244 91		internet	NULL	NULL	900/1800
Finland		Song	internet.song.fi	song@internet	songnet	
France 208	208 20/21		ebouygtel.com	NULL	NULL	900/1800
France (B2Bouygtel)	b2bouygtel.com	Bouygues	guest	guest	guest	
France (contract)	208 00/01/02	Orange	orange	orange	900/1800	
France	orange.fr	Orange MIB	orange-mib	mportail	mib	mib
France		Orange				

Mobicarte	orange-acte	orange	orange	orange		
France	France	SFR 10	websfr	NULL	NULL	900/1800
Germany	262 02	D2 Vodafone	web.vodafone.de	NULL	NULL	900/1800
Germany	262 03	E-Plus	internet.eplus.de	eplus	gprs	900/1800
Germany		O2 (3G)	surfo2	guest	guest	guest
Germany	262 07/08/11	O2 (GPRS)	internet	NULL	NULL	900/1800
Germany		Quam	quam.de	quam	quam	quam
Germany	262 01/06	T-Mobile D1	internet.t-mobile	internet.t-d1.de	t-mobile	900/1800
Ghana		Areeba				
(formerly Spacefon)	internet.spacefon.com	guest	guest	guest		
Greece	202 01	Cosmote	internet	NULL	NULL	900/1800
Greece		Telestet	gnet.b-online.gr	MSISDN, e.g.		
3093XXXXXXX	24680	24680				
Greece		TIM	gint.b-online.gr	web	web	web
Greece	202 05	Vodafone	internet.vodafone.gr	NULL	NULL	900/1800
Guatemala	704 02	Comcel 02	Wap.tigo.gt	Wap	Wap	850/1800
Guatemala		PCS Digital	ideasalo	guest	guest	guest
Guyana	738 02	GT&T Cellink Plus	wap.cellinkgy.com	test	test	900
Hong Kong	454 10	New World	internet	NULL	NULL	1800
Hong Kong	454 15	Orange	web.orangehk.com	NULL	NULL	
Hong Kong	454 12	People	Internet /peoples.net	NULL	NULL	850/1800
Hong Kong	454 06/17	SmarTone	Internet/smartone	NULL	NULL	850/1800
Hong Kong	454 19	Sunday	internet	NULL	NULL	900/1800
Hong Kong	454 03/04	Three	web-g.three.com.hk	NULL	NULL	900/1800
Hungary	216 01	Pannon				
(normal)	net	NULL	NULL	900/1800		
Hungary		Pannon				
(flat rate)	netx	guest	guest	guest		
Hungary		Pannon				
(compressed)	snet	guest	guest	guest		
Hungary	216 30	T-Mobile				
(subscription)	internet	NULL	NULL	900/1800		
Hungary		T-Mobile				
(non-sub.)	internet	wap	Wap	Wap		
Hungary		T-Mobile				
(MMS)	mms-westel	mms	[supplied]	[supplied]		
Hungary						
	216 70	Vodafone				
(contract)						
(compr.)	internet.vodafone.net	NULL	NULL	900/1800		
Hungary		Vodafone				
(contract)						
(un-comp.)	standardnet.vodafone.net	guest	guest	guest		
Hungary		Vodafone				
(pre-pay)						
(comp.)	vitamax.internet.vodafone.net	guest	guest	guest		
Hungary		Vodafone				
(pre-pay)						
(un-comp.)	vitamax.snet.vodafone.net	guest	guest	guest		
India	404 02/03/31/49	AirTel	airtelgprs.com	NULL	NULL	900
India	404 21/27/43/44	BPL	bplgprs.com	bplmobile	NULL	900/1800
India	404 51-66	BSNL	celloneportal	NULL	NULL	900/1800
India	404 13	Hutch				
(normal)	www	NULL	NULL	900		
India		Hutch				

(Gujarat)	web	guest	guest	guest		
India	404 04	Idea Cellular	internet	NULL	NULL	850/1800
India		MTNL Mumbai	mmsmtnlmum	mtnl	mtnl123	mtnl123
India	404 68/69	MTNL Mumbai				
(Plan 2)	gprsmtnlmum	mtnl	mtnl123	900/1900		
Indonesia	510 11	Excelcomindo	www.xlgprs.net	xlgprs	proxl	900
Indonesia	510 21	IM3	www.indosat-m3.net			
wap.indosat-m3.net	gprs	im3	900/1800			
Indonesia	510 01	Indosat 01				
(Matrix)	satelindogprs.com					
indosatgprs	NULL	NULL	900/1800			
Indonesia	510 10	Telkomsel 10	internet			
telkomsel	wap	wap123	900/1800			
Ireland	272 03	Meteor 03	isp.mymeteor.ie	my	meteor	900/1800
Ireland	272 02	Digifone 02				
(contract)	open.internet	gprs	gprs	900/1800		
Ireland		O2				
(pre-pay)	pp.internet	gprs	gprs	gprs		
Ireland	272 01	Vodafone				
(contract)	isp.vodafone.ie	vodafone	vodafone	900/1800		
Ireland		Vodafone				
(pre-pay)	live.vodafone.com	vodafone	vodafone	vodafone		
Israel	425 02	Cellcom	internetg	NULL	NULL	850/1800
Israel		MTC-Vodafone	apn01	guest	guest	guest
Israel	425 01	Orange	orangeinternet	NULL	NULL	900/1800
Italy	222 98	Blu	INTERNET	NULL	NULL	1800
Italy		H3G	tre.it	guest	guest	guest
Italy	222 01	TIM	ibox.tim.it	NULL	NULL	900/1800
Italy	222 10	Vodafone				
(Omnitel)	web.omnitel.it	NULL	NULL	900/1800		
Italy	222 88	Wind	internet.wind			
internet.wind.biz	Wind	Wind	1800			
Jamaica	338 180	Cable & Wireless	wap	NULL	NULL	850/1900
Jamaica	338 50	Digicel	web.digiceljamaica.com	wapuser	wap03jam	900/1800
Japan	440	Vodafone				
(J-Phone)	vodafone	ai(Qvodafone	vodafone	900/1800		
Jersey		(See UK)				
Kazakhstan	401 01	Beeline	internet.beeline.kz	internet.beeline	NULL	900/1800
Kenya	639 02	Safaricom	web.safaricom.com	web	web	900/1800
Laos	457 02	ETL	etlnet	NULL	NULL	900/1800
Latvia	247 01	LMT	internet.lmt.lv	NULL	NULL	900/1800
Latvia	247 02	Tele2	internet.tele2.lv	gprs	internet	900/1800
Lebannon	415 32/33/34/35	Cellis FTML	internet.ftml.com.lb	plugged	plugged	900
Lebannon	415 03	MTC Touch	gprs.mtctouch.com.lb	NULL	NULL	900
Lithuania	246 02	Bite GSM	banga	NULL	NULL	900/1800
Lithuania	246 01	Omnitel				
(contract)	gprs.omnitel.net	NULL	NULL	900/1800		
Lithuania		Omnitel				
(no contract)	gprs.startas.lt	omni	omni	omni		
Luxembourg						
	270 01	LUXGSM	web.pt.lu	NULL	NULL	900/1800
Luxembourg	270 77	Tango	internet	tango	tango	900/1800
Luxembourg		VOXmobile	vox.lu	guest	guest	guest
Macau	455 01	CTM	ctm-mobile	NULL	NULL	900/1800
Macau		Macau Hutchison				
Telecom (Internet)	web.hutchisonmacau.com	hutchison	1234	1234		

Macau		Macau Hutchison				
Telecom (MMS)	mms.hutchisonmacau.com	hutchison	1234	1234		
Malaysia	502 10	DIGI	diginet	NULL	NULL	
Malaysia	502 13	Celcom	celcom.net.my	NULL	NULL	900/1800
Malaysia	502 12	Maxis 2G				
(contract)	internet.gprs.maxis	NULL	NULL	900/1800		
Malaysia		Maxis 3G				
(contract)	unet	maxis	wap	wap		
Malaysia		Maxis				
(pre-pay)	net	maxis	net	net		
Malaysia	502 17	Timecel	timenett.com.my			
(timenett.com.my?)	NULL	NULL	900/1800			
Malaysia	502 13	TM Touch	internet	NULL	NULL	
Malta 278	278 21	Go Mobile				
(contract)	gosurfing	NULL	NULL			
Malta		Go Mobile				
(pre-pay)	rtgsurfing	guest	guest	guest		
Mexico	334 20	Telcel	internet.itelcel.com	webgprs	webgprs2002	900/1800
Moldavia	259 02	Moldcell	internet	gprs	gprs	900
Morocco 604	604 01	Maroc Telecom	iam	wac	1987	900
Morocco	604 00	Medi Telecom	wap.meditel.ma	MEDIWAP	MEDIWAP	900/1800
Netherlands	204 08/10	KPN Mobile	internet	KPN	gprs	900/1800
Netherlands		O2	internet	guest	guest	guest
Netherlands	204 16/20	T-Mobile (Ben)				
active	internet	NULL	NULL			
Netherlands	204 12	Telfort	internet	telfortnl	password	900/1800
Netherlands	204 04	Vodafone				
(normal)	web.vodafone.nl	vodafone	vodafone	900/1800		
Netherlands		Vodafone				
(business)	office.vodafone.nl	vodafone	vodafone	vodafone		
New Zealand	530 01	Vodafone				
(unrestricted)	internet	NULL	NULL			
New Zealand		Vodafone				
(restricted)	www.vodafone.net.nz	guest	guest	guest		
Nicaragua	710	Alo Pcs	internet.ideasalo.ni	internet	internet	
Nigeria	621 50	Globacom	glosecure	wap	wap	900/1800
Nigeria	621 30	MTN Nigeria	web.gprs.mtnnigeria.net	web	web	900/1800
Nigeria	621 60	ETISALAT	etisalat	NULL	NULL	900/1800
Nigeria		Vmobile	wap.vmobile	wap	wap	wap
Nigeria		Zain	internet.ng.zain.com	internet	internet	internet
Nigeria	621 20	Airtel	internet.ng.airtel.com			
wap	wap					
Norway	621 02	Netcom	internet.netcom.no	netcom	netcom	900/1800
Norway		TalkMore	(same as Netcom)			
Norway	621 01	Telenor Mobil				
(Vodafone)	Internet					
internet.vodafone.net	NULL	NULL				
Pakistan	410 03	UFone	ufone.internet	ufone	ufone	900/1800
Panama	714 01	Cable & Wireless	apn01.cwpanama.com.pa	xxx	xxx	850
Paraguay	744	CTI	internet.ctimovil.com.py	ctigprs	ctigprs999	
Peru	716 10	Claro (TIM)	tim.pe	tim	tulibertad	
Philippines	515 02	Globe Telecoms				
(Web)	internet.globe.com.ph	globe	globe			
Philippines		Globe Telecoms				
(WAP)	www.globe.com.ph	globe	globe	globe		

Philippines	515 03	Smart	internet	witsductoor	banonoy	
Philippines	515 05	Sun Cellular	minternet	NULL	NULL	
Poland	260 02	ERA	erainternet	erainternet	erainternet	
Poland		Heyah	heyah.pl	heyah	heyah	
Poland	260 03	Orange	internet	internet	internet	
Poland	260 01	Polkomtel	www.plusgsm.pl	NULL	NULL	
Portugal	268 03	Optimus	internet	NULL	NULL	900
Portugal	268 06	TMN	internet	NULL	NULL	900/1800
Portugal	268 01	Vodafone				
(Telecel)	internet.vodafone.pt	NULL	NULL	850		
Russia	250 28	BeeLine	internet.beeline.ru	beeline	beeline	
Romania	226 01	Connex				
(Vodafone)	internet.connex.ro	internet.connex.ro	connex			
Romania	226 10	Orange	internet	NULL	NULL	
Russia	250 02	Megafon				
	internet	NULL	NULL			
Russia		Megafon				
(kvk)	internet.kvk	guest	guest	guest		
Russia		Megafon				
(Itmsk)	internet.ltmsk	guest	guest	guest		
Russia		Megafon				
(Moscow)	internet.msk	gdata	gdata	gdata		
Russia		Megafon				
(mc)	internet.mc	guest	guest	guest		
Russia		Megafon				
(NWGSM)	internet.nw	guest	guest	guest		
Russia		Megafon				
(Siberia)	internet.sib	guest	guest	guest		
Russia		Megafon				
(UGSM)	internet.ugsm	guest	guest	guest		
Russia		Megafon				
(usi)	internet.usi.ru	guest	guest	guest		
Russia		Megafon				
(Volga)	internet.volga	guest	guest	guest		
Russia	250 35	Motiv				
(uses BeeLine)	internet.beeline.ru	beeline	beeline	900		
Russia	250 01	MTS	internet.mts.ru			
internet.kuban	mts	mts	900/1800			
Russia	250 03	NCC	internet	ncc	NULL	900
Russia	250 16	NTC	internet.ntc	NULL	NULL	900/1800
Russia	250 92	PrimTel	internet.primtel.ru	NULL	NULL	900
Saint Lucia	358 110	Cable & Wireless	internet	NULL	NULL	
Saint Vincent & the Grenadines	360 070					
	Digicel	wap.digiceloecs.com	wapoecs	wap03oecs		
Saudi Arabia	420 01	STC	jawalnet.com.sa	NULL	NULL	
Senegal						
608 02	Tigo	wap.sentelgsm.com	NULL	NULL	900/1800	
Serbia-						
Montenegro	220 01	Mobtel Srbija	internet	mobtel	gprs	850
Serbia-						
Montenegro	220 03					
	Telekom Srbija	gprsinternet	mts	064		
Serbia-						
Montenegro		Telekom Srbija				
(WAP service)	gprswap	mts	064	064		
Singapore	525 03	M1	mobilenet	NULL	NULL	
Singapore	525 02	SingTel	internet	NULL	NULL	

Singapore	525 05	Starhub	shwapint	NULL	NULL	900/1800
Slovakia	231 02	Eurotel	internet	NULL	NULL	900
Slovakia		Globtel	internet	guest	guest	guest
Slovakia	231 01	Orange	internet	jusernejm	pasvord	900/1800
Slovenia	293 41	Mobitel				
(Internet)	internet	mobitel	internet	900/1800		
Slovenia		Mobitel				
(Internet Pro)	internetpro	mobitel	internet	internet		
Slovenia	293 40	Simobil	[none]	NULL	NULL	900
South Africa	655 07	Cell-C	internet	NULL	NULL	850
South Africa	655 10	MTN	internet	NULL	NULL	900/1800
South Africa	655 01	Vodacom	internet	NULL	NULL	850
South Africa		Virgin Mobile	vdata	guest	guest	guest
Spain	214 03	Amena	internet	CLIENTE	AMENA	900/1800
Spain	214 07	Telefonica				
(Movistar)	movistar.es	movistar	movistar	900		
Sri Lanka	413 02	Dialog GSM				
(contract)	www.dialogsl.com	NULL	NULL	900/1800		
Sri Lanka		Dialog GSM				
(pre-pay)	ppwap	guest	guest	guest		
Sri Lanka	634 01	Mobitel	isp	NULL	NULL	
Spain	214 01	Vodafone				
(Airtel)	airtelnet.es	vodafone	vodafone	900/1800		
Sweden	240 07	Tele2. Comviq	isplnk1.swip.net	gprs	internet	900
Sweden		Tele2 (3G)	internet.tele2.se	wap	wap	wap
Sweden	240 08	Telenor				
(GPRS)	internetvodafone.net	NULL	NULL	900/1800		
Sweden		Telenor				
(3G)	services.vodafone.net	guest	guest	guest		
Sweden	240 01	Telia	online.telia.se	NULL	NULL	850
Sweden		Tre (3G)	data.tre.se	void	void	void
Switzerland	228 03	Orange	internet	NULL	NULL	
Switzerland	228 02	Sunrise	internet	internet	internet	900/1800
Switzerland	228 01	Swisscom	gprs.swisscom.ch	NULL	NULL	
Taiwan	466 11	Chunghwa				
Telecom	emome or					
internet	NULL	NULL	900/1800			
Taiwan	466 01	Far EasTone	fetnet01	NULL	NULL	
Taiwan	466 88	KG Telecom	internet	NULL	NULL	
Taiwan		Taiwan Cellular	internet	guest	guest	guest
Thailand	520 01	AIS	internet	ais	ais	
Thailand	520 18	DTAC	www.dtac.co.th	NULL	NULL	
Turkey	286 04	Aycell	aycell	NULL	NULL	
Turkey	286 02	Telsim	telsim	telsim	telsim	900/1800
Turkey	286 01	Türkcell	internet	gprs	gprs	
UAE	424 02	Etisalat	mnet	mnet	mnet	
UK		3	three.co.uk	guest	guest	guest
UK	234 50	Jersey				
Telecom	pepper	abc	abc			
UK	234 02	O2				
(contract)	mobile.o2.co.uk	web	password	900/1800		
UK	UK	O2				
(contract)						
-faster-	mobile.o2.co.uk	faster	password			
UK		O2				
(pre-pay)	payandgo.o2.co.uk	payandgo	payandgo	payandgo		
UK	234 33/34	Orange (Pay Monthly)	orangeinternet	user	pass	
UK		Orange				

(Pay and Go)	orangewap	Multimedia	Orange	Orange		
UK	234 30	T-Mobile	general.t-mobile.uk	user	pass	900/1800
UK	234 31/32	Virgin Mobile	gotovirginmobile.com	user	NULL	900/1800
UK	234 15	Vodafone				
(contract)	internet	web	webs			
UK		Vodafone				
(pre-pay)	pp.vodafone.co.uk	wap	wap	wap		
Ukraine		Djuice	www.djuice.com.ua	igprs	igprs	igprs
Ukraine		Jeans	www.jeans.ua	guest	guest	guest
Ukraine	255 03	Kyivstar	www.kyivstar.net	igprs	internet	
Ukraine		Mobi-GSM	internet.urs	guest	guest	guest
Ukraine	255 01	UMC 01	www.umc.ua	NULL	NULL	
Uruguay	748 01/03	ANCEL	gprs.ancel	NULL	NULL	
Uruguay	748 10	CTI	internet.ctimovil.com.uy	ctiweb	ctiweb999	
Uruguay	748 07	Movistar	webapn.movistar.com.uy	movistar	movistar	
USA		Cingular				
(ex AT&T)	proxy	guest	guest	guest		
USA		Cingular				
(With acceleration)	ISPCINGULAR	ISPDAQ				
CINGULARGPRS						
.COM	CINGULAR1	CINGULAR1				
USA		Cingular				
(NO acceleration)	ISPCINGULAR	ISPAQ				
CINGULARGPRS						
.COM	CINGULAR1	CINGULAR1				
USA	310 41	Cingular				
(non-contract)	WAP.CINGULAR	WAPAQ				
CINGULARGPRS						
.COM	CINGULAR1	900/1800				
USA		T-Mobile (Internet)	internet2.voicestream.com	guest	guest	guest
USA		T-Mobile (VPN)	internet3.voicestream.com	guest	guest	guest
USA	310 26	T-Mobile				
(non-contract)	wap.voicestream.com	NULL	NULL	900/1800		
Uzbekistan	434 07	Uzdunrobita	net.urd.uz	user	pass	
Venezuela	734 02	Digitel TIM	gprswb.digitel.ve	NULL	NULL	



www.bigben.eu